

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**This Page Blank (uspto)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number  
WO 01/78946 A1

(51) International Patent Classification<sup>7</sup>: B24D 7/16,  
B29C 65/06, C09J 5/06

(21) International Application Number: PCT/US00/23258

(22) International Filing Date: 24 August 2000 (24.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/551,477 18 April 2000 (18.04.2000) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: FRITZ, Peter, J.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). CONWELL, Stanley, L.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: TRUSSELL, James, J. et al.; Office Of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.



(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR ATTACHING A FASTENER TO A SURFACE TREATING MEMBER, AND SUCH AN ARTICLE HAVING A FASTENER

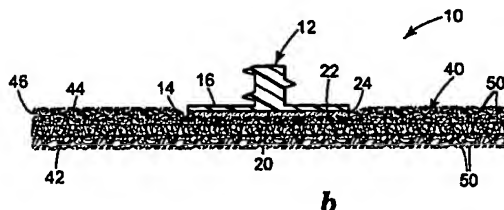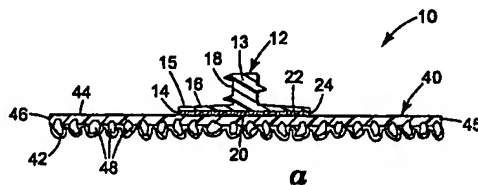

(57) Abstract: A surface treating article including a surface conditioning member (40), a fastener (12) including a generally planar surface and a drive member (18), and a layer of adhesive (24) between the surface conditioning member (40) and the planar surface (14) of said fastener (12), where the layer of adhesive includes rotational orientation. The present invention also provides a preferred method of attaching a fastener (12) to a surface conditioning member (40) that includes inducing relative rotation between a fastener (12) and a surface conditioning member (40) with a layer of adhesive (24) in contact with a planar surface (14) of the fastener (12) and the surface conditioning member (40) so as to soften the layer of adhesive (24) and thereafter stopping the relative rotation between the fastener (12) and the surface treating member (40).

WO 01/78946 A1

## METHOD FOR ATTACHING A FASTENER TO A SURFACE TREATING MEMBER, AND SUCH AN ARTICLE HAVING A FASTENER

### 5     TECHNICAL FIELD

      The present invention relates generally to a method of attaching a fastener to a surface conditioning member and such surface treating article, and more particularly to a method of inducing relative rotation between a fastener and a surface conditioning member with a layer of adhesive between the fastener and an abrasive article and such an  
10    abrasive article.

### BACKGROUND OF THE INVENTION

      Various articles and methods for attaching thermoplastic fasteners to articles are known in the art. For example, U.S. Patent No. 4,636,124 to Gugle et al. discloses a one-  
15    piece thermoplastic fastener assembly having a friction-weld fastening surface with a centrally located heat-activated adhesive pellet. A plurality of deflector segments are integrally formed with the friction-weld surface at the plurality of radial distances from the axis of rotation. In one embodiment, the deflector segments are shown in a continuous spiral rib, which extends between the central portion of the friction weld surface to a point  
20    adjacent to its periphery. The spiral rib prevents the heat-activated adhesive from being driven away from the base and provides a means for uniformly distributing the heat activated adhesive across the surface of the friction weld surface.

      U.S. Patent No. 4,551,189 to Peterson discloses a friction welding fastener system for fusing a thermoplastic material fastener to a substrate by heat of friction induced  
25    through the application of rotative and axial forces applied to the fastener. A cavity is formed inwardly of the bottom surface of the thermoplastic base member and a heat activated adhesive material having a bonding affinity for both the base material and the substrate material is inserted into the cavity to form a layer having a thickness equal or  
30    greater than the thickness of the base member. The base member is rotated with sufficient rotative and axial forces to cause the heat activated adhesive layer to adhere to the substrate.

-2-

European Patent Application 0 937 544 A2 to Smith discloses a method of producing an abrasive treatment disc, whereby the disc is formed from an abrasive material ultrasonically welded to a mounting member.

U.S. Patent No. 5,931,729 to Penttila et al. discloses a method of spin welding a fastener to an article and such an article. The fastener is melt-bonded to the back of the surface conditioning disc. The surface treating article comprises a working surface adapted to treat a workpiece surface, and a back surface, the back surface comprising an open woven scrim. In a preferred embodiment, the surface treating article has a nonwoven abrasive surface conditioning disc. The Penttila et al. reference states it is also possible for the surface treating article to be a coated abrasive disc, a polishing pad, a brush, or a similar surface treating element.

Surface conditioning discs having a threaded male button bonded to the back side of the disc by an adhesive are available commercially as Roloc™ surface conditioning discs from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota. These surface conditioning discs have an abrasive member and a fastener attached to the abrasive member by a layer of thermosetting adhesive. The fastener has a base and a threaded portion for attaching to a suitable back-up pad. These surface conditioning discs are assembled by first loading the fastener into heated fixture (typically 200-260° C), such that the threaded portion of the fastener is held by the heated fixture and the base is exposed. The heated fixture heats the fastener. Next, a layer of thermosetting adhesive is applied to the fastener base, typically by spraying. After spraying the thermosetting adhesive, an abrasive member is centered relative to the fastener held by the heated fixture and then makes contact with the layer of thermosetting adhesive on the fastener. The abrasive member and fastener are held in a compressive force until the layer of thermosetting adhesive has cured. Then, the surface conditioning disc is removed from the heated fixture.

#### SUMMARY OF THE INVENTION

One aspect of the present invention provides a surface treating article. The surface treating article comprises: a) a surface conditioning member; b) a fastener including a generally planar surface and a drive member; and c) a layer of adhesive between the

-3-

surface conditioning member and the planar surface of the fastener, where the layer of adhesive includes rotational orientation.

5 In one preferred embodiment of the above surface treating article, the surface conditioning member includes a working surface and a back surface opposite the working surface, where the layer of adhesive is between the back surface of the surface conditioning member and the planar surface of the fastener. In another aspect of this embodiment, the layer of adhesive is coated on substantially all of the back surface of the surface conditioning member.

10 In another preferred embodiment of the above surface treating article, the surface conditioning member is an abrasive member. In another aspect of this embodiment, the working surface comprises a non-woven abrasive. In yet another aspect of this embodiment, the working surface comprises a coated abrasive.

15 In another preferred embodiment of the above surface treating article, the fastener comprises a thermoplastic material. In another aspect of this embodiment, the fastener comprises nylon. In another preferred embodiment of the above surface treating article, the fastener comprises metal. In another aspect of this embodiment, the fastener comprises steel.

20 In another preferred embodiment of the above surface treating article, the layer of adhesive comprises a thermoplastic adhesive. In another aspect of this embodiment, the layer of thermoplastic adhesive was heated by inducing relative rotation between the fastener and the surface conditioning member with the layer of thermoplastic adhesive between the planar surface of the fastener and the surface conditioning member. In another aspect of this embodiment, the layer of adhesive comprises a thermosettable thermoplastic adhesive.

25 In another preferred embodiment of the above surface treating article, the fastener includes a generally planar base and a drive member, where the planar base includes the planar surface and a second surface opposite the planar surface, and where the drive member extends from the second surface of the planar base. In another aspect of this embodiment, the planar base allows the adhesive to flow freely between the back surface  
30 of the surface conditioning member and the planar base, where the adhesive is in a softened state.

-4-

Another aspect of the present invention provides an alternative a surface treating article. The surface treating article comprises: a) a surface conditioning member; b) a fastener including a generally planar surface and a drive member, where the planar surface includes a center portion and an outer portion adjacent the center portion; and c) a layer of adhesive between the surface conditioning member and the planar surface of the fastener, where the layer of adhesive is bonded more firmly to the surface conditioning member adjacent the outer portion of the planar surface of the fastener than the layer of adhesive adjacent the center portion of the planar surface of the fastener.

In one preferred embodiment of the above surface treating article, the surface conditioning member includes a working surface and a back surface opposite the working surface, where the layer of adhesive is between the back surface of the surface conditioning member and the planar surface of the fastener. In another aspect of this embodiment, the layer of adhesive is coated on substantially all of the back surface of the surface conditioning member.

In another preferred embodiment of the above surface treating article, the surface conditioning member is an abrasive member. In another aspect of this embodiment, the working surface comprises a non-woven abrasive. In yet another aspect of this embodiment, the working surface comprises a coated abrasive.

In another preferred embodiment of the above surface treating article, the fastener comprises a thermoplastic material. In another aspect of this embodiment, the fastener comprises nylon. In yet another preferred embodiment of the above surface treating article, the fastener comprises metal. In another aspect of this embodiment, the fastener comprises steel.

In another preferred embodiment of the above surface treating article, the layer of adhesive comprises a thermoplastic adhesive. In another aspect of this embodiment, the layer of thermoplastic adhesive was heated by inducing relative rotation between the fastener and the surface treating article with the layer of thermoplastic adhesive between the planar surface of the fastener and the surface treating article. In yet another aspect of this embodiment, the layer of adhesive comprises a thermosettable thermoplastic adhesive.

In yet another preferred embodiment of the above surface treating article, the fastener includes a generally planar base and a drive member, where the planar base includes the planar surface and a second surface opposite the planar surface, and where the

-5-

drive member extends from the second surface of the planar base. In another preferred embodiment of the above surface treating article, the planar base allows the adhesive to flow freely between the back surface of the surface treating article and the planar base, where the adhesive is in a softened state.

5           Another aspect of the present invention provides a method for attaching a fastener to a surface conditioning member. The method for attaching a fastener to a surface conditioning member comprises the steps of: a) inducing relative rotation between a fastener and a surface conditioning member with a layer of thermoplastic adhesive in contact with a planar surface of the fastener and the surface conditioning member so as to  
10           soften the layer of adhesive to form a bond between the fastener and the surface conditioning member; and b) thereafter stopping the relative rotation between the fastener and the surface treating member.

          In one preferred embodiment of the above method, the layer of adhesive comprises a sheet of adhesive. In another aspect of this embodiment, the sheet of adhesive comprises  
15           a disc of adhesive. In another preferred embodiment of the above method, the layer of adhesive comprises an annulus of adhesive.

          In one preferred embodiment of the above method, the surface conditioning member includes a working surface and a back surface opposite the working surface, where step a) includes inducing relative rotation between the fastener and the surface  
20           conditioning member with the layer of adhesive in contact with the planar surface of the fastener and the back surface of the surface conditioning member. In another aspect of this embodiment, the surface conditioning member comprises an abrasive member. In yet another aspect of this embodiment, the method further includes the step of coating the layer of adhesive on the back surface of the surface conditioning article prior to step a). In  
25           another aspect of this embodiment, the method further includes the step of coating substantially all of the back surface of the surface conditioning article with the layer of adhesive prior to step a). In yet another aspect of this embodiment, the working surface comprises a coated abrasive. In another aspect of this embodiment, the working surface comprises a non-woven surface.

30           In another preferred embodiment of the above method, the fastener comprises a thermoplastic material. In another aspect of this embodiment, the fastener comprises



-6-

nylon. In another preferred embodiment of the above method, the fastener comprises metal. In another aspect of this embodiment, the fastener comprises steel.

5 In yet another preferred embodiment of the above method, the layer of adhesive comprises a thermoplastic adhesive. In another aspect of this embodiment, the layer of thermoplastic adhesive comprises a thermosettable thermoplastic adhesive.

In another preferred embodiment of the above method, the fastener includes a generally planar base and a drive member, where the planar base includes the planar surface and a second surface opposite the planar surface, and where the drive member extends from the second surface of the planar base.

10 In another preferred embodiment of the above method, step a) comprises inducing a relative rotation of from 2,000 to 10,000 RPM. In another preferred embodiment of the above method, step a) comprises applying a compressive force of between 5 and 90 pounds between the fastener and the surface conditioning member. In another aspect of this embodiment, step a) causes the planar surface of the fastener to soften and bond with  
15 the surface conditioning member.

In another preferred embodiment of the above method, the method further includes the step of coating the layer of adhesive on the planar surface of the fastener prior to step a). In yet another preferred embodiment of the above method, the method provides a surface treating article prepared according to the method.

20

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention will be further explained with reference to the appended Figures, wherein like structure is referred to by like numerals throughout the several views, and wherein:

25 Figure 1 is a plan view of a preferred embodiment of a surface treating article according to the present invention;

Figure 2a is a cross-section of the surface treating article of Figure 1 taken along line 2a-2a;

30 Figure 2b is a cross-section of an alternative embodiment of the surface treating article of Figure 1 taken along line 2b-2b;

-7-

Figure 3 is a plan view of an alternative embodiment of a surface treating article according to the present invention;

Figure 4 is a cross-section of the surface treating article of Figure 3 taken along line 4-4;

5        Figure 5 is a partially schematic view of a preferred apparatus for carrying out the method of the present invention prior to contacting the fastener to the layer of adhesive, which is in contact with the surface conditioning member; and

      Figure 6 is a view of a portion of the apparatus of Figure 5, illustrating the fastener in contact with the layer of adhesive, which is in contact with the surface conditioning member.  
10

#### DETAILED DESCRIPTION OF THE INVENTION

A preferred embodiment of a surface treating article 10 of the present invention is illustrated in Figure 1. The surface treating article 10 includes a surface conditioning member 40 and a fastener 12 attached by a layer of adhesive 24. To form the surface  
15        treating article 10, the fastener 12 and surface conditioning member 40 are rotated relative to one another with a layer of adhesive between them so as to soften the layer of adhesive to allow it to flow between the fastener 12 and surface conditioning member 40. Upon cooling, the layer of adhesive forms a bond between the fastener 12 and the surface  
20        conditioning member 40. The preferred spin welding method for softening the layer of adhesive between the fastener 12 and surface treating member 40 is described below.

The surface conditioning member 40 includes a working surface 42 and a back surface 44 opposite the working surface 42. The surface conditioning member 40 also includes a peripheral surface 46 extending between the working surface 42 and the back  
25        surface 44. As illustrated, the fastener 12 is attached to the back surface 44 of the surface conditioning member 40 by the layer of adhesive 24. Alternatively, the fastener 12 may be attached to the working surface 42 of the surface conditioning member 40 by the layer of adhesive 24.

Fastener 12 includes a generally planar base 15 and a drive member 18. The  
30        planar base 15 includes a generally planar surface 14. Prior to inducing relative rotation

-8-

between the fastener 12 and the surface conditioning member 40, a layer of adhesive is placed between the planar surface 14 of fastener 12 and the back surface 44 of the surface conditioning member 40. Preferably, the layer of adhesive is a layer of thermoplastic adhesive. By inducing relative rotation between the fastener 12 and the surface conditioning member 40 with a layer of thermoplastic adhesive between, the friction causes the layer of thermoplastic adhesive to soften and flow in between the fastener 12 and surface conditioning member 40. Upon cooling, the layer of adhesive 24 forms a bond between the fastener 12 and surface conditioning member 40. In one preferred embodiment, the layer of adhesive is a discrete sheet of adhesive. The advantage of having a discrete sheet of adhesive is that it allows a sheet of adhesive to be placed on or off of the surface conditioning member 40 or repositioned on the surface conditioning member 40 prior to inducing relative rotation between the fastener 12 and the surface conditioning member 40. Preferably, such a sheet of adhesive is in the shape of a circle or a disc and corresponds generally to the shape of the planar surface 14 of fastener 12. More preferably, the disc of adhesive has a diameter less than the diameter of the planar surface 14 so that the adhesive will not flow beyond the outer edge of the fastener 12. Preferably, the sheet of adhesive 24 has a uniform thickness to form a uniform layer of adhesive 24 between the fastener 12 and surface conditioning member 40. In one preferred embodiment, the layer of adhesive is 0.05 cm. to 0.3 cm thick before spin welding. In another preferred embodiment, the layer of adhesive is 0.15 cm thick before spin welding. Such discrete sheets of thermoplastic adhesive may be cut out of a long web of thermoplastic adhesive.

Due to the relative rotation between the fastener 12 and the surface conditioning member 40 for softening the adhesive, the layer of adhesive includes rotational orientation, which is schematically indicated by the reference number 30. This rotational orientation may be observed in different forms. As one example, the layer of adhesive 24 may include swirls in a rotational direction, indicating the fastener 12 was rotated relative to the surface conditioning member 40. As another example, depending on the composition of the back surface 44 of the surface conditioning member 40, some back surface material may become mixed into in the layer of adhesive 24 in a rotational direction. With the back surface material mixed in with the adhesive, both the adhesive and back surface material may be observed in the swirls in a rotational direction.

-9-

The fastener 12 includes a base 15 and a drive member 18. Base 15 includes a planar surface 14 and a second surface 16 opposite the planar surface 14. The planar surface 14 of the fastener 12 is preferably smooth and planar so as to provide sufficient surface area to achieve the frictional temperatures required to soften the layer of adhesive to allow it to flow. Also, the planar surface 14 of the fastener 12 is preferably smooth and planar to allow the layer of adhesive 24 to flow freely between the fastener 12 and the back surface 44 of the surface treating article 10 when the adhesive is heated and softened. However, the planar surface 14 of the fastener 12 may include a textured surface while still being planar. It is also preferred that the planar surface 14 of the fastener 12 is circular. The planar surface 14 includes a center portion 20 and an outer portion 22 outside the center portion 20. In one preferred embodiment, the planar surface 14 of the fastener 12 has a diameter of approximately 3 cm (1.2 in), although larger and smaller fasteners are within the scope of the invention. As illustrated, second surface 16 tapers toward the outer edge of the fastener 12. Extending from the center of the second surface 16 is drive member 18. A preferred fastener 12 is disclosed in U.S. Patent No. 3,562,968, "Surface Treating Tool," Johnson et al.

Drive member 18 is configured for attaching the surface treating article 10 to a desired power tool. In a preferred embodiment, the drive member 18 is a threaded stud which fits with a corresponding female threaded back-up pad (not illustrated). A suitable back-up pad is available commercially as a Roloc™ disc pad from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

Figure 2a illustrates a cross-sectional view of the surface treating article 10 taken along line 2a-2a of Figure 1. The surface conditioning member 40 is an abrasive member 40. In the illustrated embodiment, the abrasive member 40 is a coated abrasive member 40. The back surface 44 includes a backing 45. A preferred backing is one that is thick enough and stiff enough to withstand the spin welding process. The working surface 42 of the abrasive member 40 includes an abrasive layer. The abrasive layer includes a multiplicity of abrasive particle 48 bonded to the backing by a matrix coat and optional size coat. Coated abrasive members and their method of manufacture are well known to those skilled in the art. One example of a coated abrasive member 40 is illustrated in U.S.

Patent No. 5,766,277, "Coated Abrasive Article and Method of Making the Same," DeVoe et al.

In a preferred embodiment, the layer of adhesive 24 bonds more firmly between the outer portion 22 of the fastener 12 and the back surface 44 compared to the bond  
5 between the center portion 20 of the fastener 12 and the back surface 44. Because the linear speed caused by the rotation of the fastener 12 is greater at the outer diameter of the planar surface 14, the frictional temperatures at the outer diameter are greatest. Accordingly, the portion of the adhesive adjacent the outer portion 22 of the fastener 12 is heated more quickly than the portion of the adhesive adjacent the center portion 20. The  
10 portion adhesive 24 adjacent the outer portion 22, upon cooling, provides a strong bond between the fastener 12 and the abrasive article 40. At the center portion 20 of the planar surface 14, where rotation causes a smaller linear speed, the frictional heat is less. As a result, the layer of adhesive 24 adjacent the center portion 20 of the fastener 12 may not heat as much to provide as strong of a bond as the adhesive adjacent the outer portion 22  
15 of the fastener 12. If the fastener 12 is made of a thermoplastic material and a portion of the planar surface 14 of the fastener 12 is in direct contact with the back surface 44 of the abrasive article 40, the thermoplastic material of the fastener may also soften during spin welding to melt bond the fastener 12 to the back surface 44 of the abrasive article 40. This may be achieved by providing a layer of adhesive 24 with a diameter less than the  
20 diameter of the planar surface 14 of the fastener 12, which allows a portion of the thermoplastic fastener to be in direct contact with the abrasive article 40.

Instead of placing a layer of adhesive or a discrete sheet of adhesive as a separate item between fastener 12 and the back surface 44 of the surface conditioning member 40, the back surface 44 may be coated with a layer of adhesive, prior to inducing relative  
25 rotation between the fastener 12 and the surface conditioning member 40. Preferably, the layer of adhesive is a thermoplastic adhesive. The layer of adhesive may have a smaller or larger diameter than the diameter of the fastener 12. For instance, substantially all of the back surface 44 may be coated with the layer of adhesive. Alternatively, a layer of adhesive may be coated on the planar surface 14 of the fastener 12, prior to inducing  
30 relative rotation between the fastener 12 and the surface conditioning member 40. By coating a layer of adhesive on the back surface 44 or on the planar surface 14 of the

-11-

fastener 12, it is not necessary to center a discrete sheet of adhesive between the fastener 12 and the surface conditioning member prior to inducing relative rotation between the fastener 12 and the surface conditioning member 40.

Figure 2b illustrates a cross-sectional view of an alternative surface treating article 10 taken along line 2b-2b in Figure 1. The surface conditioning member 40 is also an abrasive member, but specifically it is a non-woven abrasive member 40. The non-woven abrasive member 40 includes fibers 50 needle tacked into a woven scrim. The working surface 42 and back surface 44 include fibers 50. A preferred non-woven abrasive member is described in detail in U.S. Patent No. 3,688,453, "Abrasive Articles," Legacy et al., the entire disclosure of which is incorporated herein by reference. As relative rotation is induced between the fastener 12 and the surface conditioning member 40, the layer of adhesive begins to soften and penetrate the spaces between the woven fibers 50, providing an additional mechanical bond between the fastener 12 and surface conditioning member 40. If the diameter of the layer of adhesive is less than the diameter of the planar surface 14 of the fastener 12, the material of the fibers may also soften during the relative rotation to melt bond with the fastener 12.

Figure 3 illustrates an alternative embodiment of the surface treating article 10a including an alternative fastener 12a. Surface treating article 10a is similar to surface treating article 10 of Figure 1, except that it includes an alternative fastener 12a and an annular layer of adhesive 36. The annular layer of adhesive 36 may be a discrete annular sheet of adhesive, which may be taken on or off the surface treating article 10a, or repositioned on the surface treating article 10a. Fastener 12a includes a threaded socket 13 for attaching the surface treating article 10a to a desired power tool. In a preferred embodiment, the threaded socket 13 fits with a corresponding male threaded back-up pad (not illustrated). A suitable back-up pad is available commercially as a Roloc™ TS Disc Pad from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

Figure 4 illustrates a cross-sectional view of the surface treating article 10a. Fastener 12a includes a base 15 and threaded socket 13. The base 15 includes an annular planar surface 14. Similar to the method described above, the fastener 12a is attached to the back surface 44 of the abrasive member 40 by an annulus of adhesive 36. Preferably, the annulus of adhesive is a layer of thermoplastic adhesive. In one preferred

-12-

embodiment, the annulus of adhesive is a discrete annular sheet of adhesive. By inducing relative rotation between the fastener 12a and the surface conditioning member 40 with an annulus of thermoplastic adhesive between, the friction causes the layer of thermoplastic adhesive to soften and flow in between the fastener 12a and surface conditioning member 40. Upon cooling, the annulus of adhesive 36 forms a bond between the fastener 12a and surface conditioning member 40. Preferably, the annular layer of adhesive is similar in dimensions to the annular planar surface 14. Alternatively, a continuous disc of adhesive may be used to attach fastener 12a to surface treating article 10a, instead of an annulus of adhesive.

Surface treating article 10a is illustrated in Figures 3 and 4 as a coated abrasive member 40. However, surface treating article 10a may include a non-woven abrasive member.

Preferably, fastener 12 is made of a thermoplastic material. Examples of suitable thermoplastic materials include nylon and polyamides. Fastener 12a is preferably made of a metal instead of a thermoplastic material. A suitable metal is steel.

Preferably, the layer of adhesive 24 is a thermoplastic adhesive. The term "thermoplastic" as used herein, including the claims, refers to a material which undergoes a physical change upon the application of heat, i.e., the material flows or softens upon heat and returns to its initial non-flowing state upon cooling. The layer of adhesive may be a thermosettable thermoplastic adhesive, which for the present invention, is a subset of thermoplastic adhesives. The term "thermosettable thermoplastic" as used herein, including the claims, refers to a material, which undergoes a physical change and chemical change upon the application of heat, i.e. the material flows or softens upon heat and returns to its initial non-flowing state upon cooling. Whereas a thermoplastic adhesive may again be heated to allow the adhesive to flow or soften again, a thermosettable thermoplastic adhesive will not flow or soften again under heat. Suitable thermoplastic adhesives include polyamide polymers and copolymers, polyester polymers and copolymers, and ethylene/vinyl acetate copolymers. Such thermoplastic adhesives are available commercially as "Jet-Melt 3738" or "Jet-Melt 3747" from Minnesota Mining and Manufacturing, St. Paul, MN. An example of a suitable thermosettable thermoplastic

-13-

adhesive is the adhesive taught in U.S. Patent No. 5,368,922, "Prepreg of Thermoplastic Polymer Particles in Liquid Thermosettable Resin," to Portelli et al.

Figure 5 illustrates a spin welding apparatus 60 for inducing relative rotation between the fastener 12 and surface conditioning member 40 with a layer of adhesive between them to form a surface treating article 10. The same apparatus may be used to spin weld fastener 12a to surface conditioning member 40 with an annulus of adhesive between them to form surface treating article 10a. As mentioned above, the layer of adhesive may be a discrete sheet of adhesive, or may be already coated on the back surface 44 of the surface treating article, or coated on the planar surface 14 of the fastener 12. A discrete sheet of adhesive is illustrated in Figures 5 and 6.

Apparatus 60 includes a frame 61 to which a motor 62 and drive mechanism 64 are mounted. In a preferred embodiment, the drive mechanism 64 is an air cylinder. The motor 62 is mounted via a slidable frame 63 to allow the slidable frame 63 and motor 62 to be driven vertically by the rod 65 extending from the air cylinder 64. Rod 65 is attached to the slidable frame 63 so as to raise and lower the slidable frame in response to actuating the cylinder 64. Extending from the motor 62 is a first shaft 66. The first shaft is coupled to a second shaft 67. In the illustrated embodiment, an optional flywheel 68 is mounted to the distal end of the second shaft 67. Also mounted at the distal end of the shaft is a fixture 70 for holding the fastener 12. The second shaft may optionally pass through bearing support 69 that extends from the slidable frame 63. It is thus seen that the motor 62 drives first shaft 66, second shaft 67, optional flywheel 68 and fixture 70; and that all of these components are raised and lowered together with slidable frame 63 in response to actuating the cylinder 64.

Fixture 70 can be any suitable fixture that will hold the fastener 12 during the spin weld operation. Fixture 70 must grip the fastener 12 securely enough to avoid slippage of the fastener 12 within the fixture 70 when the fastener is spun against the layer of adhesive 24 and the surface conditioning member 40. Fixture 70 should also provide for easy release of the fastener 12 after the spin weld process. Fixture 70 thus may include moveable elements for gripping and releasing the fastener 12 as is well known in the art.

In the embodiment illustrated in Figure 6, the fixture 70 includes a fixture body 72 having a cavity 74 therein. The cavity is sized to receive the drive member 18 of the



-14-

fastener 12. Cavity 74 may optionally be threaded for mating with the threaded drive member 18. Alternatively, cavity 74 may include moveable elements (not illustrated) for gripping and releasing the threaded stud 20. Fixture 70 optionally includes an o-ring 76. O-ring 76 engages with the second surface 16 of the fastener 12. O-ring 76 is particularly preferred when there are no moveable elements in the fixture 70 for grabbing and releasing the drive member 18. This helps eliminate slippage between the fastener 12 and fixture 70 during the spin welding. Alternatively, the face of the fixture 70 which comes into contact with the second surface 16 of the fastener 12 can be rough or textured to minimize slippage between the fixture and the fastener during spin welding. Whatever such arrangement is used, care should be taken so as not to damage the drive member 18 or the fastener 12 during spin welding.

The surface conditioning member 40 may be clamped or otherwise mechanically held to the frame 60 to keep the member 40 from rotating during spin welding. Alternatively, there may be a frictional surface on the frame 60 against which the working surface 42 of the surface conditioning member 40 rests to prevent the member 40 from rotating during spin welding. Any suitable methods for loading the fastener 12 and surface conditioning member 40 before spin welding and unloading after spin welding may be provided for and would not be expected to affect the spin weld itself or the strength of the adhesive bond.

For preferred embodiment of articles described above, a preferred method of spin welding the fastener 12 to the surface conditioning member 40 is as follows. In general, the spin weld method comprises the steps of holding stationary the surface conditioning member 40, mounting the fastener 12 in a suitable fixture 70 to be driven by the spin weld apparatus 60, which is centered generally over the surface conditioning member 40, placing a discrete sheet of thermoplastic adhesive in the approximate center of the surface conditioning member 40, accelerating the fixture 70 and fastener 12 to the desired rotational speed, activating the drive mechanism 64 to move the planar surface 14 of the fastener 12 into contact with sheet of adhesive 24 located between the fastener 12 and surface conditioning member 40, applying sufficient force between the fastener 12 and surface conditioning member 40 while the fastener is spinning to achieve a frictional temperature required to soften the sheet of adhesive 24, allowing the fixture 70 and

-15-

fastener 12 to stop rotation, maintaining force between the fastener 12 and surface conditioning member 40 while the softened layer of adhesive 24 sufficiently cools to form a bond between the fastener 12 and surface treating article member 40, and releasing the fastener 12 from the fixture 70 and removing the surface conditioning article 10. If the  
5 sheet of adhesive is of a smaller diameter compared to the planar surface 14 of fastener 12, and the fastener is made of a thermoplastic material, then the planar surface may also soften and bond with the surface conditioning member 40.

Instead of using a discrete sheet of adhesive, a layer of adhesive 24 may be already incorporated into either the fastener 12 or the surface treating member 40 before inducing  
10 relative rotation between the fastener and surface treating member 40. For instance, the planar surface 14 of the fastener 12 may be coated with a layer of adhesive, prior to mounting the fastener 12 to fixture 70. Alternatively, the back surface 44 of the surface conditioning member 40 may be coated with a layer of adhesive, prior to holding the surface conditioning article in the apparatus 60. With either of these alternative methods,  
15 it is not necessary to separately align the discrete sheet of adhesive between the fastener 12 and surface conditioning member 40.

Any commercially available spin welding apparatus 60 capable of obtaining the conditions described herein may be used, such as the PMA Spinweld 90 available from Powell, McGee Associates, Inc., of Shoreview, Minnesota. Another suitable apparatus  
20 includes an Allen-Bradley servo motor model number 1326AB-B410J-21 or model number 1326AS-B330H-21, with a 1394-AM04 axis module, all available from Allen-Bradley Company, Inc. located in Milwaukee, Wisconsin.

Preferably, the spin weld apparatus is operated in a mode that removes power from the motor 62 after the fastener 12 and surface conditioning member 40 are brought into  
25 contact under pressure, allowing the friction between the fastener and member 40 to bring the rotating fastener to a stop. Alternatively, rotation of the fixture 70 and fastener 12 can be resistance stopped.

The parameters found to affect the strength of the melt-bond between the fastener 12 and surface conditioning member 40 are as follows. The force that the cylinder 64  
30 applies to the system is preferably between about 125 and 1131 lb. (10 to 90 psi for a 4 inch diameter cylinder), more preferably between about 251 and 628 lb. (20 to 50 psi), and

-16-

most preferably between about 314 and 565 lb. (25 to 45 psi). The speed of the motor 62 is preferably from about 2,000 and 10,000 RPM. The spin time is preferably between about 0.15 seconds and 0.90 seconds. The spin time is a measurement of how long the motor 62 is maintained under power from the time the solenoid valve is signaled to apply  
5 air pressure for the cylinder to move the fixture 70 and fastener 12 towards the sheet of adhesive 24 and surface conditioning member 40 (a travel distance of from approximately 2 inches to 6 inches), and ends with the command to remove power from the motor 62 after the fastener 12 contacts the sheet of adhesive 24 and surface conditioning member 40. A useful parameter for determining suitable bond strengths is the speed of the motor  
10 (RPM) multiplied by the spin time (seconds). It has been determined that this parameter should be above a desired minimum to obtain the desired bond strength. Increasing the parameter beyond the desired minimum shifts the failure mode from release of the melt-bond to breakage of the drive member 18. Therefore, increasing this parameter above the switch-over point of the failure mode does not significantly increase the overall strength of  
15 the surface treating article. For fastening the preferred embodiments of the elements described above, it is preferred that  $(\text{RPM}) \times (\text{spin time})$  be between about 200 and 9000.

It has been found that, within a given range of rotation speed and spin time, the cylinder 64 should maintain the fastener 12 in contact with the sheet of adhesive and surface conditioning member 40 with at least a minimum preferred force to obtain a  
20 desired melt-bonded force between the layer of adhesive, fastener and the surface conditioning member, and that increasing force shifts the release mode from release of the melt bond to breakage of the drive member. Therefore, increasing the force to beyond the point at which the release mode switches does not significantly increase the overall strength of the surface treating article. For the preferred embodiments of the fasteners 12,  
25 layer of adhesive 24, and surface conditioning members 40 described herein, the compressive force between fastener 12 and surface conditioning 40 is from about 5 pounds to about 90 pounds.

The present invention has now been described with reference to several embodiments thereof. The foregoing detailed description and examples have been given  
30 for clarity of understanding only. No unnecessary limitations are to be understood therefrom. It will be apparent to those skilled in the art that many changes can be made in

-17-

the embodiments described without departing from the scope of the invention. Thus, the scope of the present invention should not be limited to the exact details and structures described herein, but rather by the structures described by the language of the claims, and the equivalents of those structures.

**WHAT IS CLAIMED IS:**

1. A surface treating article, comprising:
  - a) a surface conditioning member;
  - 5       b) a fastener including a generally planar surface and a drive member; and
  - c) a layer of adhesive between said surface conditioning member and said planar surface of said fastener, wherein said layer of adhesive includes rotational orientation.
- 10   2. The surface treating article of claim 1, wherein said surface conditioning member includes a working surface and a back surface opposite said working surface, and wherein said layer of adhesive is between said back surface of said surface conditioning member and said planar surface of said fastener.
- 15   3. The surface treating article of claim 2, wherein said layer of adhesive is coated on substantially all of said back surface of said surface conditioning member.
4. The surface treating article of claim 1, wherein said surface conditioning member is an abrasive member.
- 20   5. The surface treating article of claim 4, wherein said working surface comprises a non-woven abrasive.
6. The surface treating article of claim 4, wherein said working surface comprises a coated abrasive.
- 25   7. The surface treating article of claim 1, wherein said fastener comprises a thermoplastic material.
8. The surface treating article of claim 7, wherein said fastener comprises nylon.
- 30   9. The surface treating article of claim 1, wherein said fastener comprises metal.

10. The surface treating article of claim 9, wherein said fastener comprises steel.
11. The surface treating article of claim 1, wherein said layer of adhesive comprises a thermoplastic adhesive.
12. The surface treating article of claim 11, wherein said layer of thermoplastic adhesive was heated by inducing relative rotation between said fastener and said surface conditioning member with said layer of thermoplastic adhesive between said planar surface of said fastener and said surface conditioning member.
13. The surface treating article of claim 11, wherein said layer of adhesive comprises a thermosettable thermoplastic adhesive.
14. The surface treating article of claim 1, wherein said fastener includes a generally planar base and a drive member, wherein said planar base includes said planar surface and a second surface opposite said planar surface, and wherein said drive member extends from said second surface of said planar base.
15. The surface treating article of claim 11, wherein said planar base allows said adhesive to flow freely between said back surface of said surface conditioning member and said planar base, wherein said adhesive is in a softened state.
16. A surface treating article, comprising:
- a) a surface conditioning member;
  - b) a fastener including a generally planar surface and a drive member, wherein said planar surface includes a center portion and an outer portion adjacent said center portion; and
  - c) a layer of adhesive between said surface conditioning member and said planar surface of said fastener, wherein said layer of adhesive is bonded more firmly to said surface conditioning member adjacent said outer portion of said planar surface

-20-

of said fastener than said layer of adhesive adjacent said center portion of said planar surface of said fastener.

5 17. The surface treating article of claim 16, wherein said surface conditioning member includes a working surface and a back surface opposite said working surface, and wherein said layer of adhesive is between said back surface of said surface conditioning member and said planar surface of said fastener.

10 18. The surface treating article of claim 17, wherein said layer of adhesive is coated on substantially all of said back surface of said surface conditioning member.

19. The surface treating article of claim 16, wherein said surface conditioning member is an abrasive member.

15 20. The surface treating article of claim 19, wherein said working surface comprises a non-woven abrasive.

20 21. The surface treating article of claim 19, wherein said working surface comprises a coated abrasive.

22. The surface treating article of claim 16, wherein said fastener comprises a thermoplastic material.

25 23. The surface treating article of claim 22, wherein said fastener comprises nylon.

24. The surface treating article of claim 16, wherein said fastener comprises metal.

25. The surface treating article of claim 24, wherein said fastener comprises steel.

30 26. The surface treating article of claim 16, wherein said layer of adhesive comprises a thermoplastic adhesive.

-21-

27. The surface treating article of claim 26, wherein said layer of thermoplastic adhesive was heated by inducing relative rotation between said fastener and said surface treating article with said layer of thermoplastic adhesive between said planar surface of said fastener and said surface treating article.

5

28. The surface treating article of claim 26, wherein said layer of adhesive comprises a thermosettable thermoplastic adhesive.

29. The surface treating article of claim 16, wherein said fastener includes a generally planar base and a drive member, wherein said planar base includes said planar surface and a second surface opposite said planar surface, and wherein said drive member extends from said second surface of said planar base.

10

30. The surface treating article of claim 26, wherein said planar base allows said adhesive to flow freely between said back surface of said surface treating article and said planar base, wherein said adhesive is in a softened state.

15

31. A method for attaching a fastener to a surface conditioning member, comprising the steps of:

20       a) inducing relative rotation between a fastener and a surface conditioning member with a layer of thermoplastic adhesive in contact with a planar surface of the fastener and the surface conditioning member so as to soften the layer of adhesive to form a bond between the fastener and the surface conditioning member; and  
b) thereafter stopping the relative rotation between the fastener and the surface  
25       treating member.

25

32. The method of claim 31, wherein the layer of adhesive comprises a sheet of adhesive.

33. The method of claim 32, wherein the sheet of adhesive comprises a disc of adhesive.

30

34. The method of claim 31, wherein the layer of adhesive comprises an annulus of adhesive.



35. The method of claim 31, wherein the surface conditioning member includes a working surface and a back surface opposite said working surface, and wherein step a) includes inducing relative rotation between the fastener and the surface conditioning member with the layer of adhesive in contact with the planar surface of the fastener and the back surface of the surface conditioning member.

36. The method of claim 35, wherein the surface conditioning member comprises an abrasive member.

37. The method of claim 36, wherein the working surface comprises a coated abrasive.

38. The method of claim 36, wherein the working surface comprises a non-woven surface.

39. The method of claim 31, wherein the fastener comprises a thermoplastic material.

40. The method of claim 39, wherein the fastener comprises nylon.

41. The method of claim 31, wherein the fastener comprises metal.

42. The method of claim 41, wherein the fastener comprises steel.

43. The method of claim 31, wherein the layer of adhesive comprises a thermoplastic adhesive.

44. The method of claim 43, wherein the layer of thermoplastic adhesive comprises a thermosettable thermoplastic adhesive.

45. The method of claim 31, wherein the fastener includes a generally planar base and a drive member, wherein the planar base includes the planar surface and a second surface opposite the planar surface, and wherein the drive member extends from the second surface of the planar base.

46. The method of claim 31, wherein step a) comprises inducing a relative rotation of from 2,000 to 10,000 RPM.

5     47. The method of claim 31, wherein step a) comprises applying a compressive force of between 5 and 90 pounds between the fastener and the surface conditioning member.

48. The method of claim 47, wherein step a) causes the planar surface of the fastener to soften and bond with the surface conditioning member.

10



49. The method of claim 35, further comprising the step of coating the layer of adhesive on the back surface of the surface conditioning article prior to step a).

15     50. The method of claim 49 further comprising the step of coating substantially all of the back surface of the surface conditioning article with the layer of adhesive prior to step a).


51. The method of claim 31, further comprising the step of coating the layer of adhesive on the planar surface of the fastener prior to step a).

20     52. A surface treating article, prepared according to the method of claim 31.


1/3

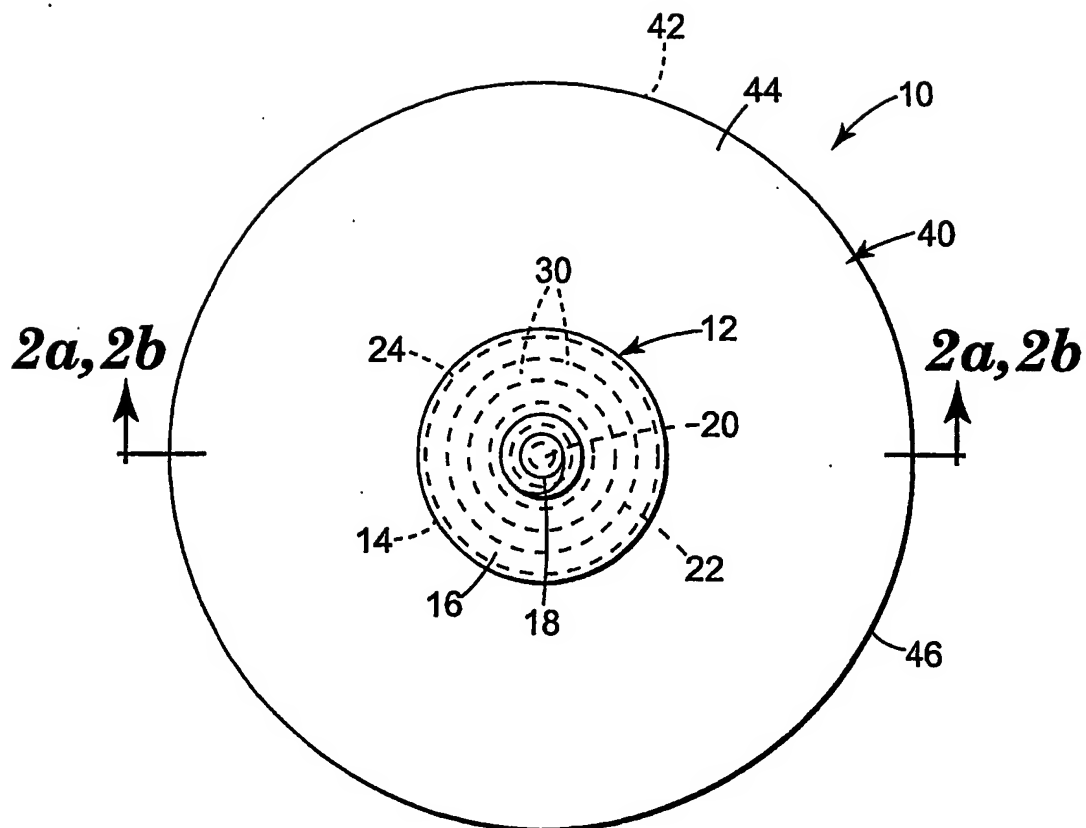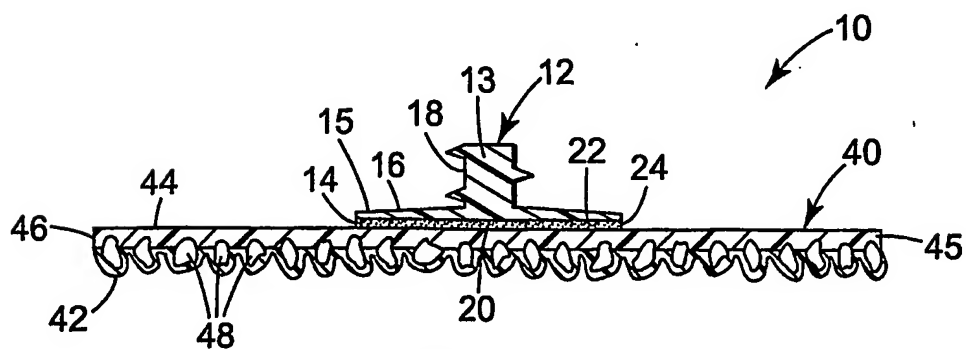**Fig. 1.****Fig. 2a**


2/3

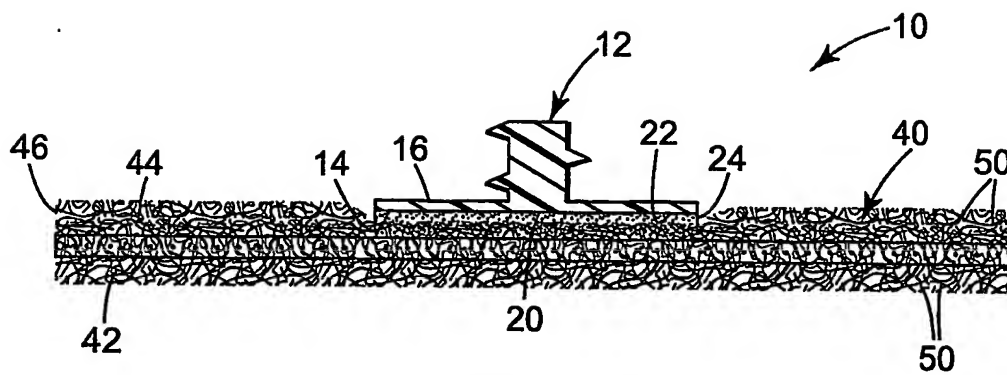

**Fig. 2b**

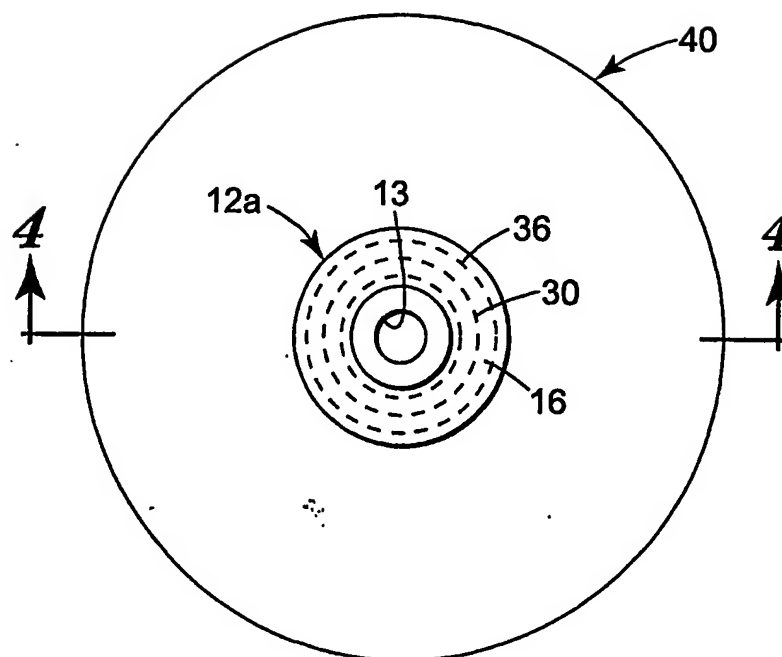


**Fig. 3**

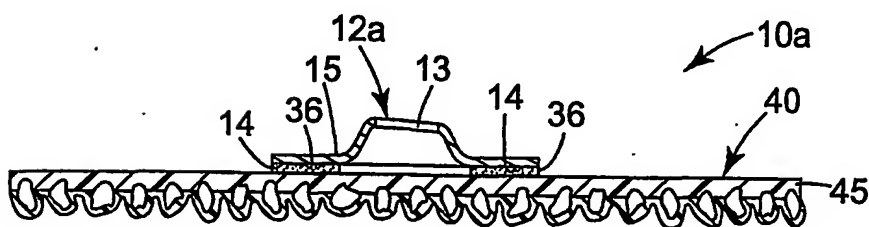


**Fig. 4**

3/3

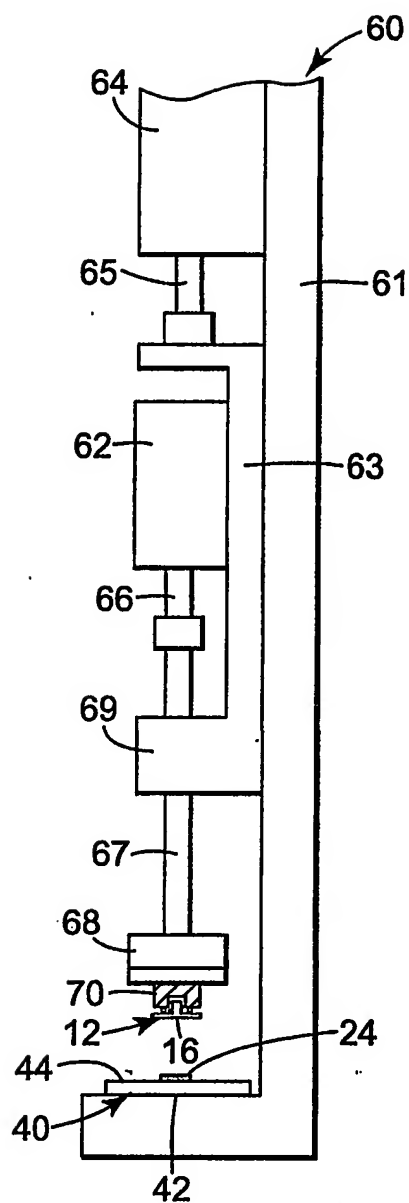

**Fig. 5**

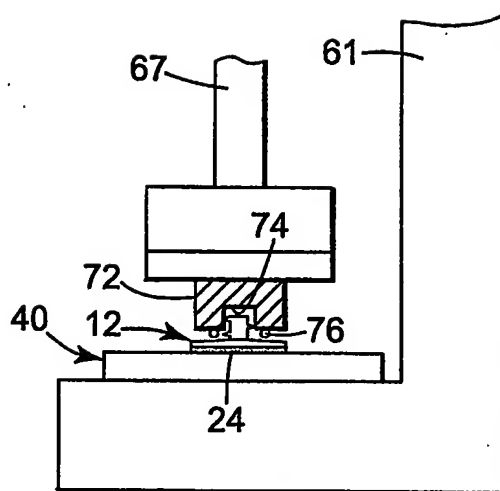

**Fig. 6**

## INTERNATIONAL SEARCH REPORT

Inten Application No  
PCT/US 00/23258

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B24D/16 B29C65/06 C09J5/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B24D B29C C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 851 357 A (RIBICH W ET AL) 3 December 1974 (1974-12-03) column 3, line 26 - line 37 column 5, line 6 - column 6, line 21	1-52
A	US 5 931 729 A (PORTER GERALD R ET AL) 3 August 1999 (1999-08-03) cited in the application the whole document	1-52
Y	DE 297 03 898 U (SCAN SCHLEIFMITTEL GMBH) 24 April 1997 (1997-04-24) page 3, paragraph 2; claim 5	1-52
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

28 December 2000

Date of mailing of the international search report

04/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Cordenier, J

## INTERNATIONAL SEARCH REPORT

Inte: Application No  
PCT/US 00/23258

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 07, 31 July 1996 (1996-07-31) -& JP 08 057958 A (NIFCO INC), 5 March 1996 (1996-03-05) abstract; figures 5,7	1-52
A	US 3 136 100 A (J.ROBERTSON) 9 June 1964 (1964-06-09) column 5, line 5 - line 22; figures	1-30
A	US 4 141 181 A (MUNNICH HERMANN) 27 February 1979 (1979-02-27) column 1, line 17 - line 20 column 2, line 10 - line 13	1-30
A	DE 44 42 978 A (KOENIGSHEIM STEFAN) 8 June 1995 (1995-06-08) column 1, line 17; figure 1	1-30
A	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 03, 31 March 1997 (1997-03-31) -& JP 08 300486 A (NIFCO INC), 19 November 1996 (1996-11-19) abstract	1,16, 31-52
A	DE 42 10 066 C (MERCEDES-BENZ AG) 9 June 1993 (1993-06-09) column 3, line 55 - line 61; claim 4	1,16, 31-52
A	US 5 298 098 A (HOEDL HERBERT K) 29 March 1994 (1994-03-29) abstract column 7, line 47 - line 53; figure 2A	31-52
A	US 5 593 120 A (HAMERSKI MICHAEL D) 14 January 1997 (1997-01-14) column 4, line 66 -column 5, line 11 column 6, line 19	31-52
A	US 4 778 702 A (HUTTER III CHARLES G) 18 October 1988 (1988-10-18) column 11, line 9 - line 12; figure 25 column 10, line 18 - line 22; claim 3	

## INTERNATIONAL SEARCH REPORT

 Inter Application No  
 PCT/US 00/23258

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3851357 A	03-12-1974	US 3916703 A US 3914144 A AT 325503 B DE 2203930 A FR 2125039 A GB 1381622 A IT 948983 B JP 51000651 B	04-11-1975 21-10-1975 27-10-1975 17-08-1972 22-09-1972 22-01-1975 11-06-1973 09-01-1976
US 5931729 A	03-08-1999	AU 4080297 A EP 0975460 A WO 9846413 A US 6001202 A	11-11-1998 02-02-2000 22-10-1998 14-12-1999
DE 29703898 U	24-04-1997	NONE	
JP 08057958 A	05-03-1996	NONE	
US 3136100 A	09-06-1964	NONE	
US 4141181 A	27-02-1979	DE 7608858 U FR 2345267 A GB 1558431 A IT 1084831 B	15-07-1976 21-10-1977 03-01-1980 28-05-1985
DE 4442978 A	08-06-1995	NONE	
JP 08300486 A	19-11-1996	NONE	
DE 4210066 C	09-06-1993	NONE	
US 5298098 A	29-03-1994	CA 2038877 C AU 1563392 A WO 9216418 A EP 0575434 A JP 6506171 T AT 127417 T DE 69204665 D DE 69204665 T ES 2079861 T KR 184528 B	27-12-1994 21-10-1992 01-10-1992 29-12-1993 14-07-1994 15-09-1995 12-10-1995 08-02-1996 16-01-1996 15-04-1999
US 5593120 A	14-01-1997	CA 2203644 A DE 69505150 D DE 69505150 T EP 0793571 A JP 10510032 T WO 9615897 A	30-05-1996 05-11-1998 02-06-1999 10-09-1997 29-09-1998 30-05-1996
US 4778702 A	18-10-1988	US 4668546 A AU 579026 B AU 6212686 A BR 8604236 A DE 3670131 D EP 0219217 A JP 1712438 C JP 3078057 B JP 62122740 A	26-05-1987 10-11-1988 05-03-1987 28-04-1987 10-05-1990 22-04-1987 11-11-1992 12-12-1991 04-06-1987



Inter Application No  
PCT/US 00/23258

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page Blank (uspto)

This Page Blank (uspto)